


SUBCABINET 63 A

Lightweight and compact size cabinet that either stands on its own or can be hung on a wall. Easy to lift from its carrying handle and light (11 kg) to carry. The cabinet has self-closing, lockable safety covers. The solid frame of the cabinet is made of powder-coated and corrosion-resistant 2 mm aluminum and withstands heavy use on construction sites.




SKU: S19168

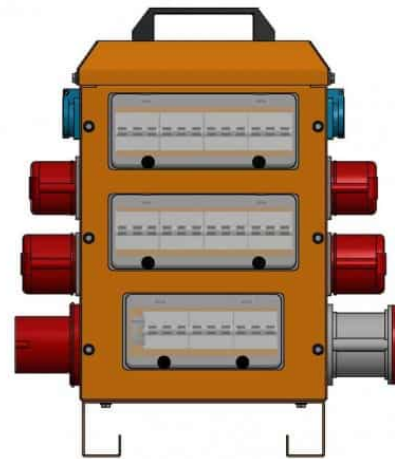

TECHNICAL ATTRIBUTES

Nominal Current	63 A	Weight	11 kg
Nominal voltage	400 V (50 Hz)	Measurements (H x W x L)	543 x 466 x 273 mm
Socket outlets	4 x 16A (230V), 2 x 16A, 2 x 32A, 1 x 63A	Enclosure class	IP44
RCD	30 mA ja 300 mA	Model	U63-4221-12 FI
Oikosulkukestavyys	Icf = 17 kA	Ordering number	S19168
		Approvals	CE

DIAGRAM IMAGES

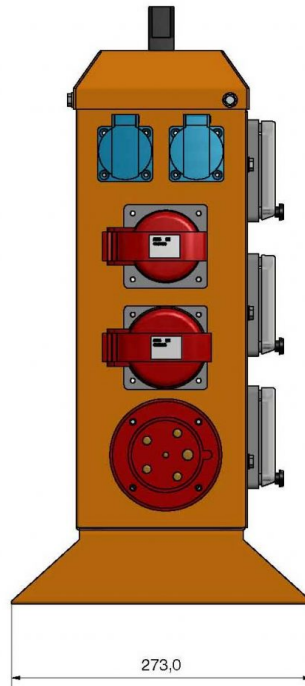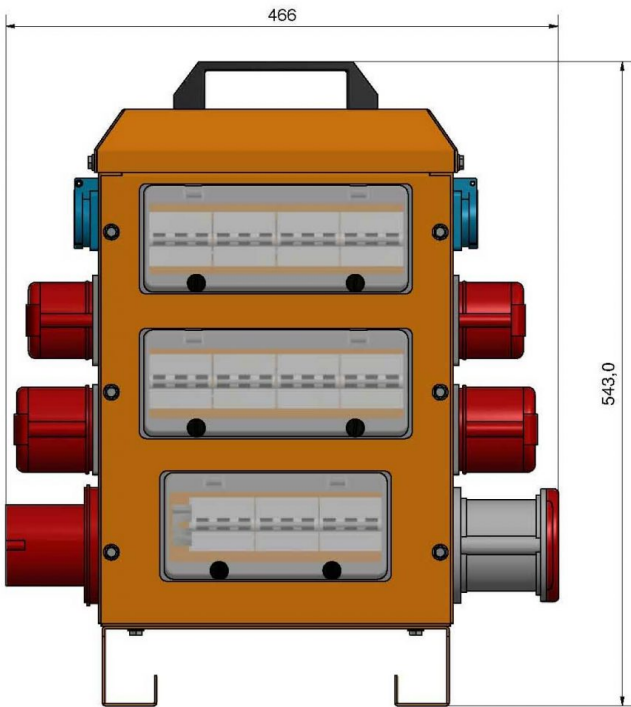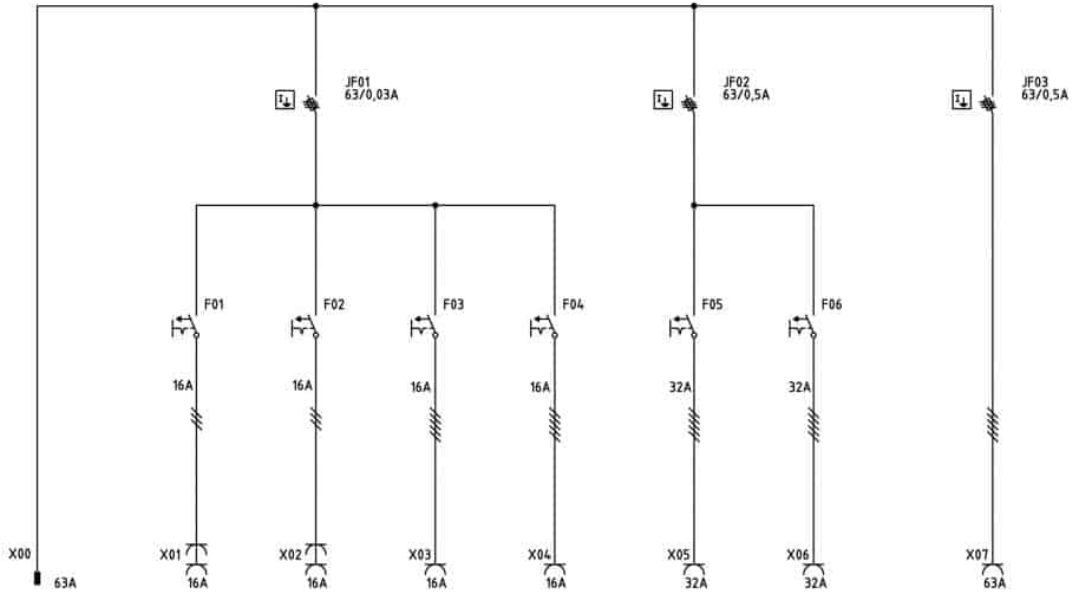

OTHER PRODUCT IMAGES

