


SUBCABINET 63 A

Lightweight and compact size cabinet that either stands on its own or can be hung on a wall. Easy to lift from its carrying handle and light (11 kg) to carry. The cabinet has self-closing, lockable safety covers. The solid frame of the cabinet is made of powder-coated and corrosion-resistant 2 mm aluminum and withstands heavy use on construction sites.




SKU: S19168

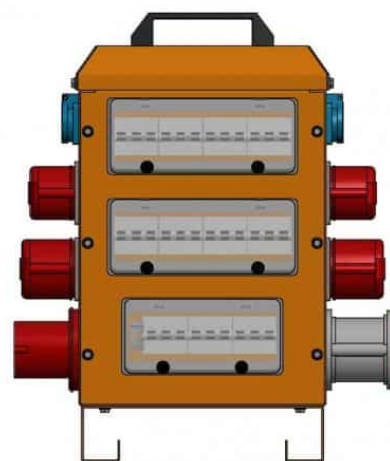

TECHNICAL ATTRIBUTES

| | | | |
|---------------------------|---|---------------------------------|--------------------|
| Nominal Current | 63 A | Weight | 11 kg |
| Nominal voltage | 400 V (50 Hz) | Measurements (H x W x L) | 543 x 466 x 273 mm |
| Socket outlets | 4 x 16A (230V), 2 x 16A, 2 x 32A, 1 x 63A | Enclosure class | IP44 |
| RCD | 30 mA ja 300 mA | Model | U63-4221-12 FI |
| Oikosulkukestavyys | Icf = 17 kA | Ordering number | S19168 |
| | | Approvals | CE |

DIAGRAM IMAGES

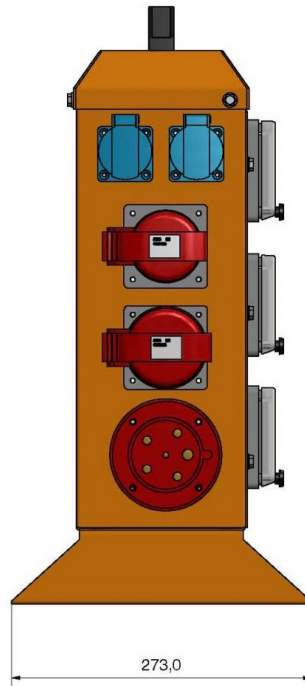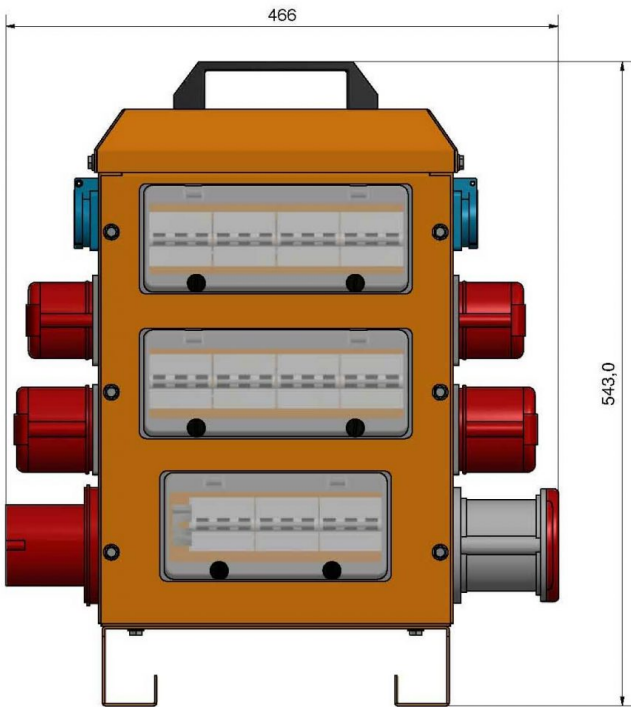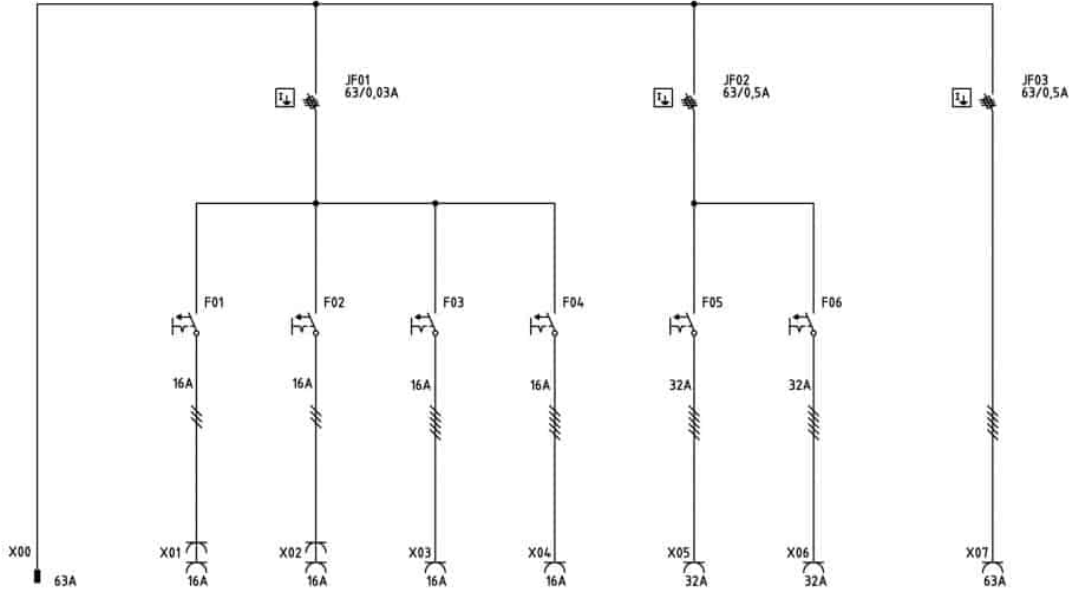

OTHER PRODUCT IMAGES

