

## SUBCABINET FOR FLOORLEVELS TAK 63/100A

63/100A subcabinet with fixed input cable connection. Suitable length cables can be measured to fit between the floor layers (however, leave a little extra cable to allow the center to be moved). The control panel is equipped with interchangeable connectors. The cabinet is made of powder-coated and corrosion-resistant 2 mm aluminum and its robust construction withstands hard handling on site. The cabinet has a carrying handle and can be hung on the wall. The covers are a self-closing security model.






SKU: S19125

### TECHNICAL ATTRIBUTES

<b>Nominal Current</b>	63 A	<b>Weight</b>	14 kg
<b>Nominal voltage</b>	400 V (50 Hz)	<b>Dimensions (H x W x D)</b>	675 x 459 x 196 mm
<b>Syöttösulake</b>	max. 100 A	<b>Enclosure class</b>	IP44
<b>Socket outlets</b>	8 x 16A (230V), 2 x 16A, 1 x 32A, 1 x 63A	<b>Model</b>	U63K/8211-11 FI
<b>RCD</b>	30 mA ja 300 mA	<b>Ordering number</b>	S19125
<b>Oikosulkukestavyys</b>	Icf = 17 kA	<b>Approvals</b>	CE

# DIAGRAM IMAGES

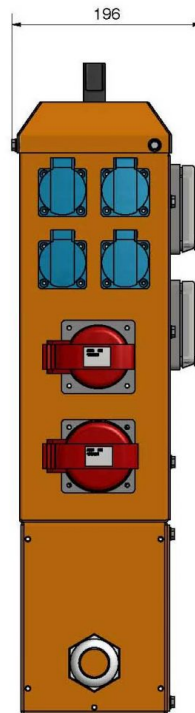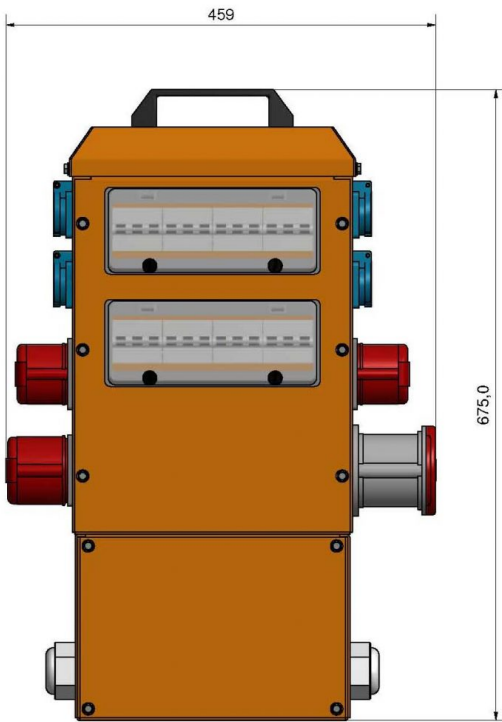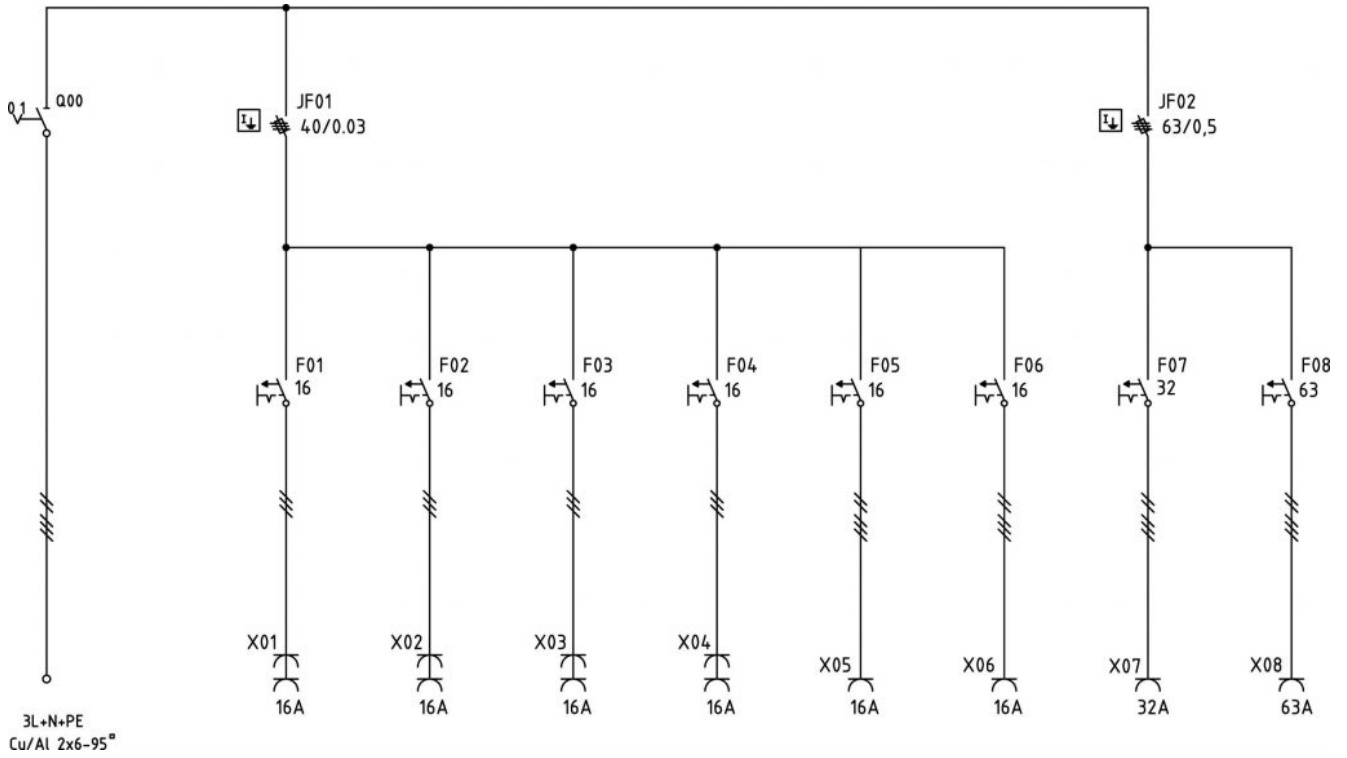

## OTHER PRODUCT IMAGES

