

SUBCABINET FOR FLOORLEVELS TAK 63/100A PRO KS

63/100 subcabinet with one 63A output without RCD. The feed is with fixed cable, so that suitable length cables can be measured to fit between the floor layers (however, leave a little extra cable to allow the center to be moved). The control panel is equipped with interchangeable connectors. The cabinet is made of powder-coated and corrosion-resistant 2 mm aluminum and its robust construction withstands hard handling on site. The cabinet has a carrying handle and can be hung on the wall. The covers are a self-closing security model.




SKU: S19367

TECHNICAL ATTRIBUTES

Nominal Current	63 A	Weight	14 kg
Nominal voltage	400 V (50 Hz)	Dimensions (H x W x D)	675 x 459 x 196 mm
Syöttösulake	max. 100 A	Enclosure class	IP44
Socket outlets	8 x 16A (230V), 2 x 16A, 1 x 32A, 1 x 63A	Model	U63K/8211-11 K
RCD	30 mA ja 300 mA	Ordering number	S19367
Oikosulkukestavyys	Icf = 17 kA	Approvals	CE

DIAGRAM IMAGES

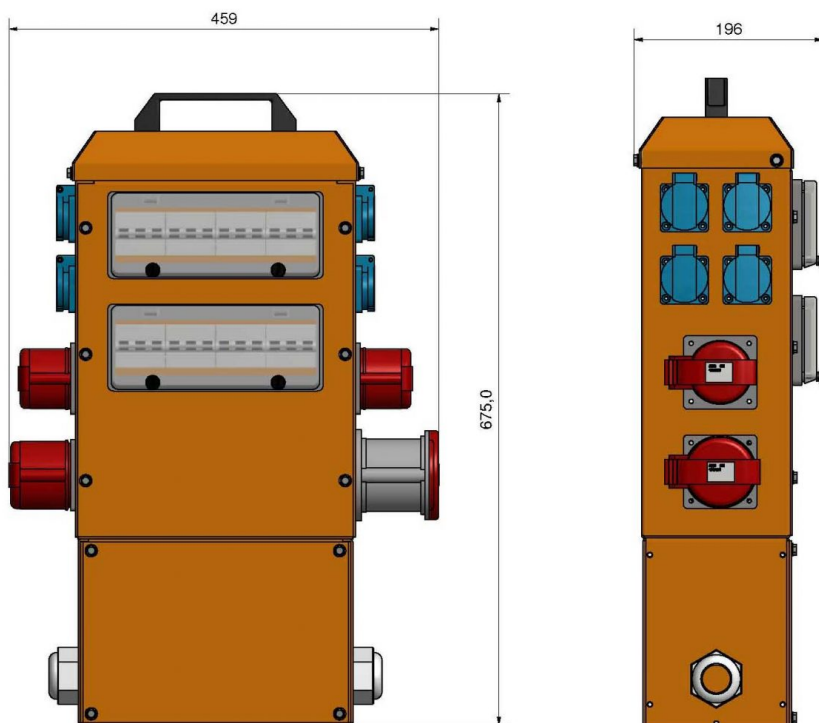

OTHER PRODUCT IMAGES

