

SUBCABINET TAK 63A

A 63A cabinet with foldable stainless steel leg, made of powder-coated and corrosion-resistant 2 mm aluminum. The outlets are behind a lockable door so the cabinet is well suited for the initial stage construction site. Robust construction that withstands hard handling.

SKU: S19115






TECHNICAL ATTRIBUTES

Nominal Current	63 A	Measurements (H x W x L)	885 x 735 x 282 mm
Nominal voltage	400 V (50 Hz)	Enclosure class	IP44
Socket outlets	6 x 16A (230V), 3 x 16A, 2 x 32A, 1 x 63A	Model	U63/6321-21 FI
Short-circuit resistance	I _{cf} = 17 kA	Ordering number	S19115
Weight	21 kg	Approvals	CE, EN 60 439-4

ADDITIONAL PRODUCT DESCRIPTION

DIAGRAM IMAGES

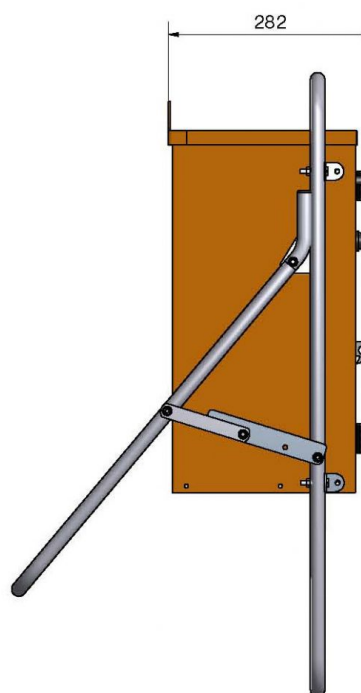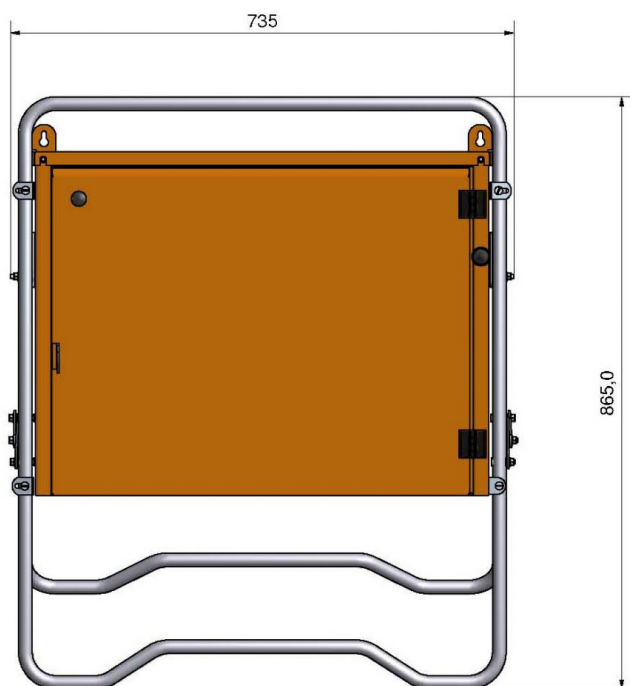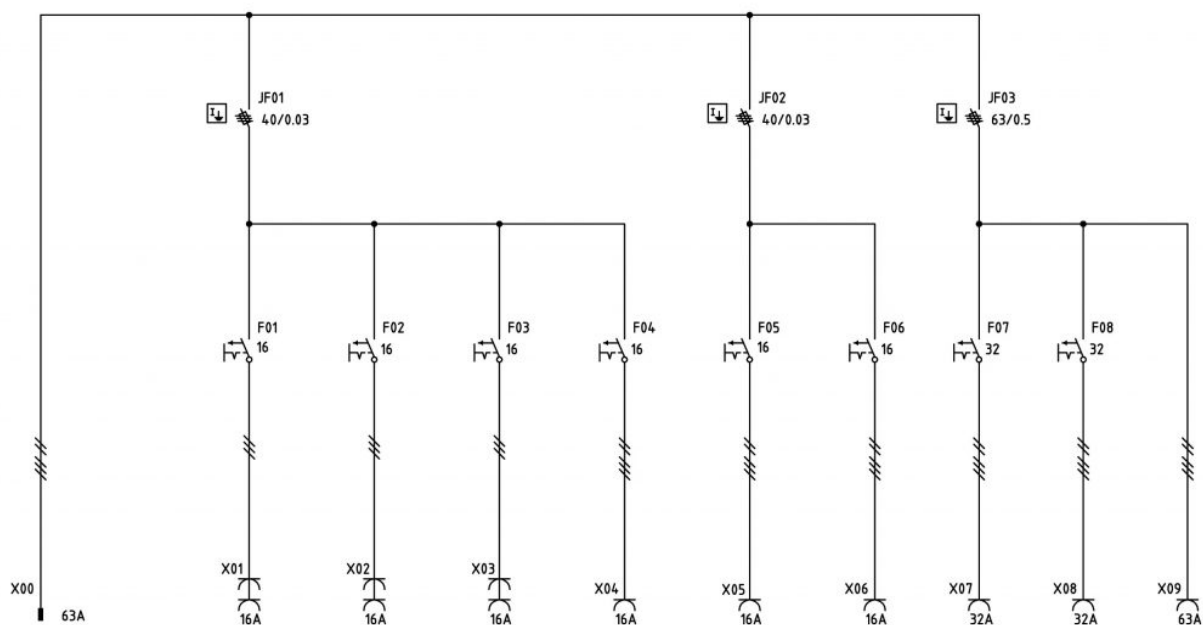

OTHER PRODUCT IMAGES

