

SUB CABINET TAK 125A KS

125 A cabinet with fixed input cable connection with foldable stainless steel leg, made of powder-coated and corrosion-resistant 2 mm aluminum. The outlets are behind a lockable door so the cabinet is well suited for the initial stage construction site. Robust construction that withstands hard handling.




SKU: S19323



TECHNICAL ATTRIBUTES

Nominal Current	125 A	Weight	41 kg
Nominal voltage	400 V (50 Hz)	Dimensions (H x W x D)	1145 x 884 x 331 mm
Input	Virtakytkin 125 A	Enclosure class	IP44
Size of the input cable	10-95	Model	SF125/3122-13
Socket outlets	3 x 16A (230V), 1 x 16A, 2 x 32A, 2 x 63A	Ordering number	S19323
RCD	30 mA ja 500 mA	Approvals	CE, EN 60 439-4

DIAGRAM IMAGES

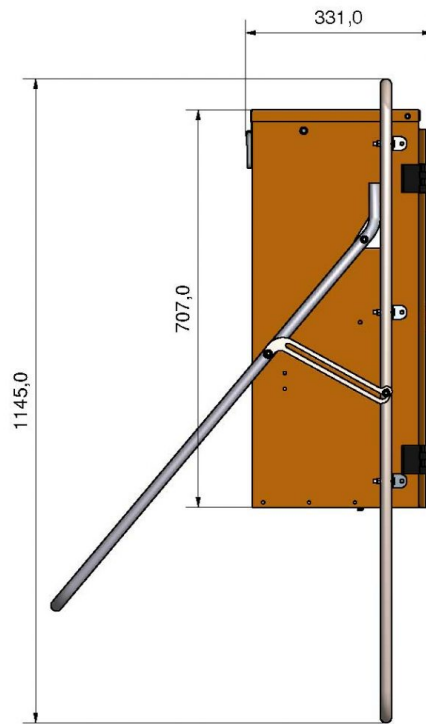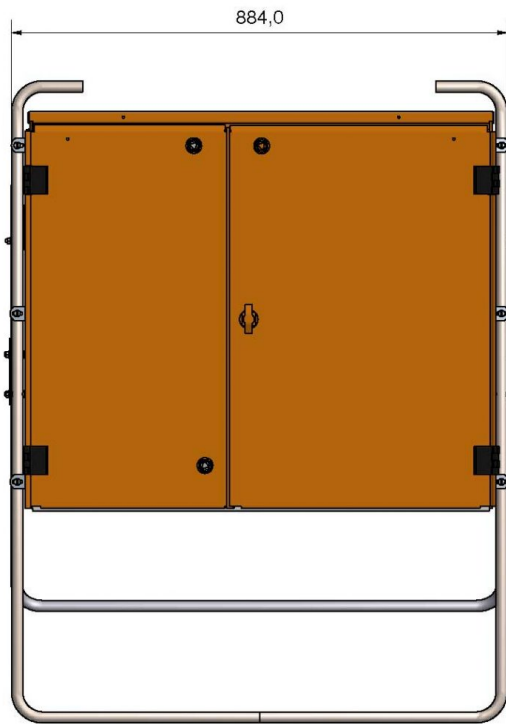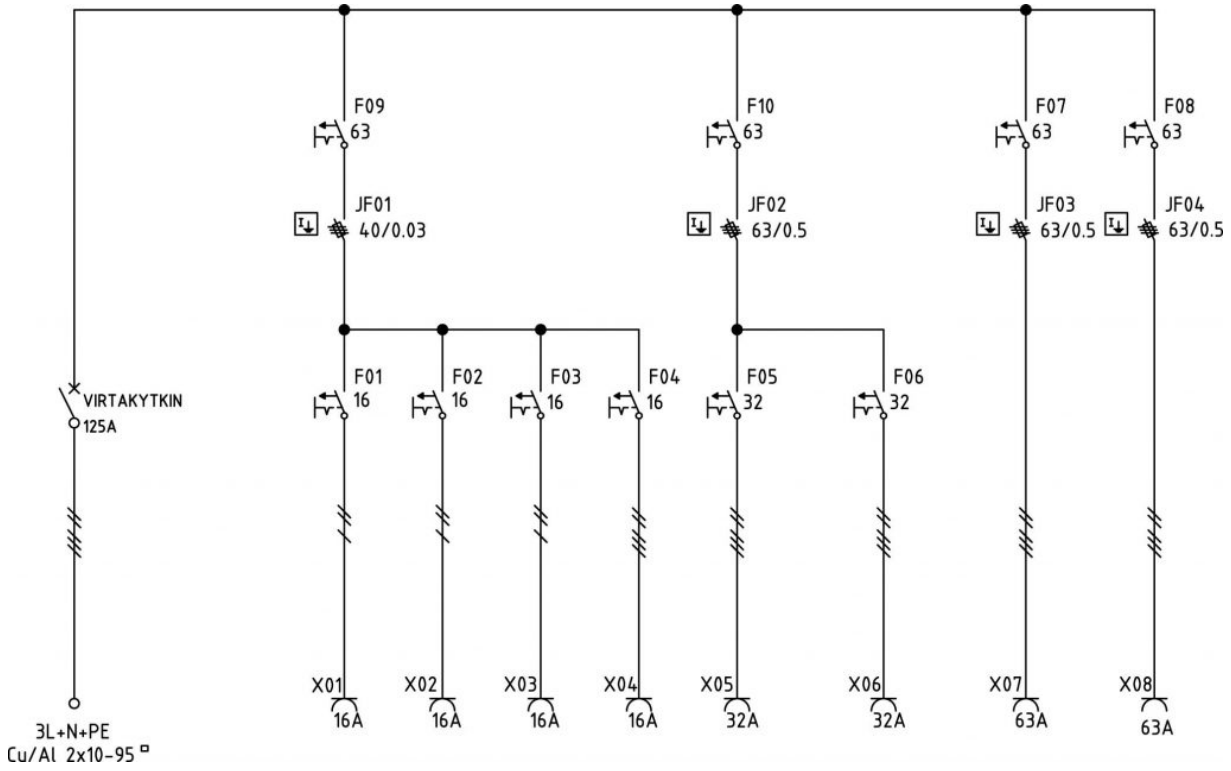

OTHER PRODUCT IMAGES

