


SUB CABINET 160 A

The 160A site substation is made of powder-coated and corrosion-resistant 2 mm aluminum. The solid structure of the cabinet withstands hard handling on site. The cabinet is equipped with lifting eyes, a stand designed for the truck and has lockable doors.

SKU: S19299

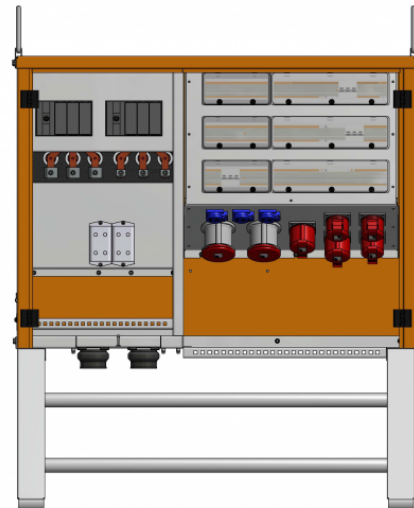

TECHNICAL ATTRIBUTES

| | | | |
|--------------------------------|--|-------------------------------|-------------------------|
| Nominal Current | 160 A | Oikosulkukestavyys | I _{cf} = 25 kA |
| Nominal voltage | 400 V (50 Hz) | Weight | 77 kg |
| Input fuses | NH00 160 A | Dimensions (H x W x D) | 1239 x 1163 x 405 mm |
| Size of the input cable | 1×95-240 | Enclosure class | IP44 |
| Fixed outlet | 1 x SLK 160 NH00 160A | Model | FSF160/1/3322-23 FI |
| Socket outlets | 3 x 16A (230V), 3 x 16 A, 2 x 32A, 2 x 63A | Ordering number | S19299 |
| RCD | 30 mA ja 300 mA | Approvals | CE |

DIAGRAM IMAGES

