

## TEMPORARY POWER SUPPLY SUBCABINET 250 A

The 250A subcabinet is made of powder-coated and corrosion-resistant 2 mm aluminum. The solid structure of the cabinet withstands hard handling on site. The cabinet is equipped with lifting eyes, a stand designed for the truck and has lockable doors.




SKU: S19300

### TECHNICAL ATTRIBUTES

<b>Nominal Current</b>	250 V	<b>Oikosulkukestavyys</b>	I <sub>cf</sub> = 25 kA
<b>Nominal voltage</b>	400 V (50 Hz)	<b>Weight</b>	80 kg
<b>Syötön sulake</b>	NH1 250 A	<b>Dimensions (H x W x D)</b>	1293 x 1163 x 405 mm
<b>Size of the input cable</b>	1 x 95-240	<b>Enclosure class</b>	IP44
<b>Kiinteät lähdöt</b>	2 x SLK 160 ja 1 x SLK 400 / NH00 125 A ja NH1-2 250 A	<b>Model</b>	FSF250/21/3222-13
<b>Socket outlets</b>	3 x 16A (230V), 2 x 16A, 2 x 32A, 2 x 63A	<b>Ordering number</b>	S19300
<b>RCD</b>	30 mA ja 300 mA	<b>Approvals</b>	CE

# DIAGRAM IMAGES

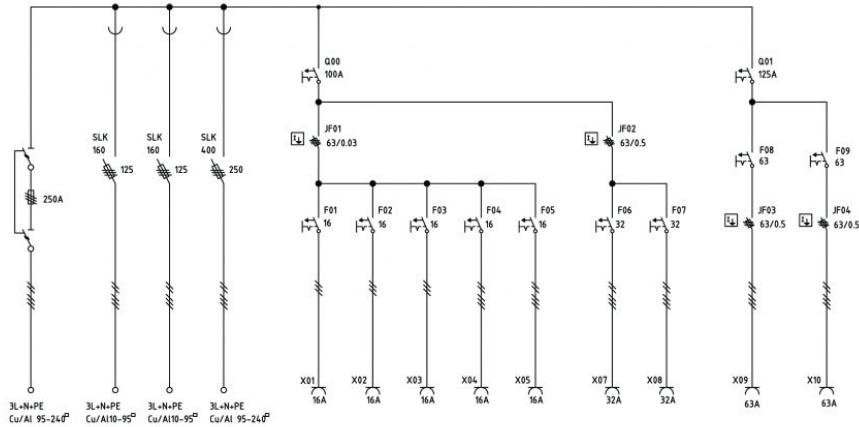

SF 250/1" 3"22-13 S193  
 HS AS  
 22.02.1"

