

SUB CABINET TAK 63A PRO

A daisy-chained subcabinet whose daisy-chained 63A output has no RCD.

Lightweight and compact site cabinet that can either stand on its own or can be hung on a wall. Easy to lift from its carrying handle and light (11 kg) to carry. The cabinet has self-closing, lockable safety covers. The solid frame of the cabinet is made of powder-coated and corrosion-resistant 2 mm aluminum and withstands heavy use on construction sites.




SKU: S19355

TECHNICAL ATTRIBUTES

Nominal Current	63 A	Weight	11 kg
Nominal voltage	400 V (50 Hz)	Dimensions (H x W x D)	543 x 466 x 273 mm
Socket outlets	4 x 16A (230V), 2 x 16A, 2 x 32A, 1 x 63A	Enclosure class	IP44
RCD	30 mA ja 500 mA	Model	Mini63/4221-11 FI
Short-circuit resistance	I _{cf} = 17 kA	Ordering number	S19355
		Approvals	CE, EN 60 439-4

DIAGRAM IMAGES

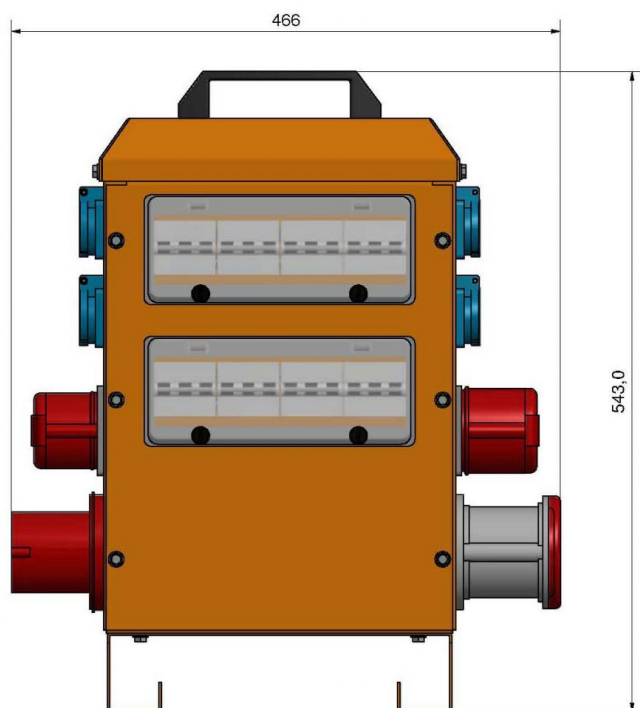

OTHER PRODUCT IMAGES

