

## SUB CABINET TAK 63A

Lightweight and compact site cabinet that can either stand on its own or can be hung on a wall. Easy to lift from its carrying handle and light (11 kg) to carry. The cabinet has self-closing, lockable safety covers. The solid frame of the cabinet is made of powder-coated and corrosion-resistant 2 mm aluminum and withstands heavy use on construction sites.


SKU: S19124



## TECHNICAL ATTRIBUTES



|                                 |                                           |                               |                    |
|---------------------------------|-------------------------------------------|-------------------------------|--------------------|
| <b>Nominal Current</b>          | 63 A                                      | <b>Dimensions (H x W x D)</b> | 543 x 466 x 273 mm |
| <b>Nominal voltage</b>          | 400 V (50 Hz)                             | <b>Enclosure class</b>        | IP44               |
| <b>Socket outlets</b>           | 8 x 16A (230V), 1 x 16A, 1 x 32A, 1 x 63A | <b>Model</b>                  | U63/8111-11 FI     |
| <b>RCD</b>                      | 30 mA ja 500 mA                           | <b>Ordering number</b>        | S19124             |
| <b>Short-circuit resistance</b> | I <sub>cf</sub> = 17 kA                   | <b>Approvals</b>              | CE                 |
| <b>Weight</b>                   | 11 kg                                     | <b>Model, PRO</b>             | Mini63/4221-11 FI  |
|                                 |                                           | <b>Ordering number PRO</b>    | S19355             |

## DIAGRAM IMAGES

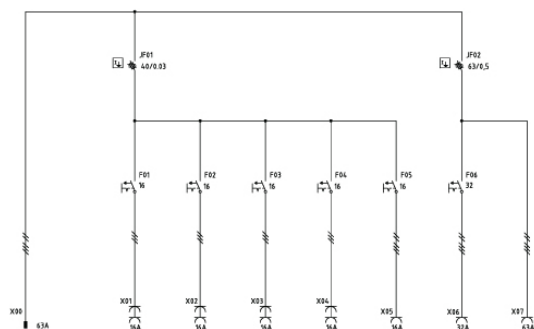

5

A\*

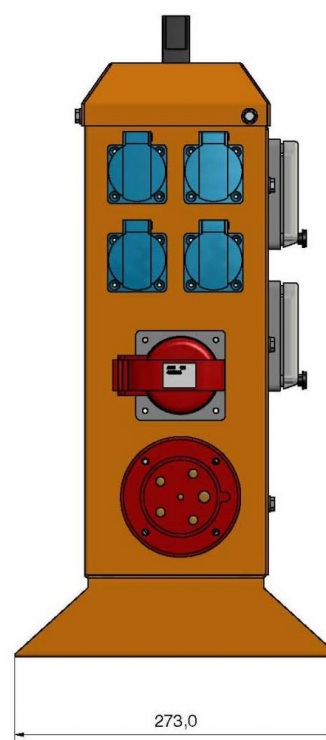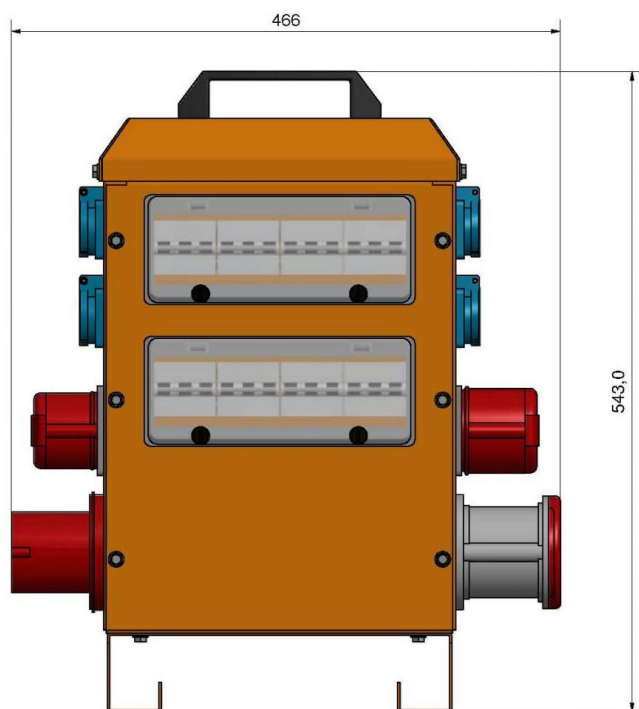

## OTHER PRODUCT IMAGES

