

TEMPORARY POWER SUPPLY CABINET WITH METER 1250 A

Designed for really large sites, the TPK 1250A control panel can be modified as needed during the ordering phase. The delivery time is approx. 6 weeks, so that the cabinet can be modified according to the customer's needs.

The cabinet is sturdy and has lifting loops and forklift pockets on the stand. Power supply, space allocation for the kWh meter and outputs are all behind lockable doors. The powder-coated 2 mm marine aluminum body material is corrosion-resistant. The cabinet has a 1200 A railing and current transformer measurement.






SKU: S19184

TECHNICAL ATTRIBUTES

Nominal Current	1200 A	Oikosulkukestavyys	I _{cf} = 25 kA
Nominal voltage	400 V (50 Hz)	Weight	425 kg
Input	1200 A (4 x 400 A)	Dimensions (H x W x D)	1683 x 1587 x 1277 mm
Size of the input cable	4x95-240	Enclosure class	IP44
Kiinteät lähdöt	NH00 125A ja NH3 400A	Model	ZF1200/304 FI
Fuse output	3 x SLK 160 ja 4 x SLK 630	Ordering number	S19184
Vikavirtasuojakytkimet	30 mA ja 300 mA	Approvals	CE, EN 60 439-4

DIAGRAM IMAGES

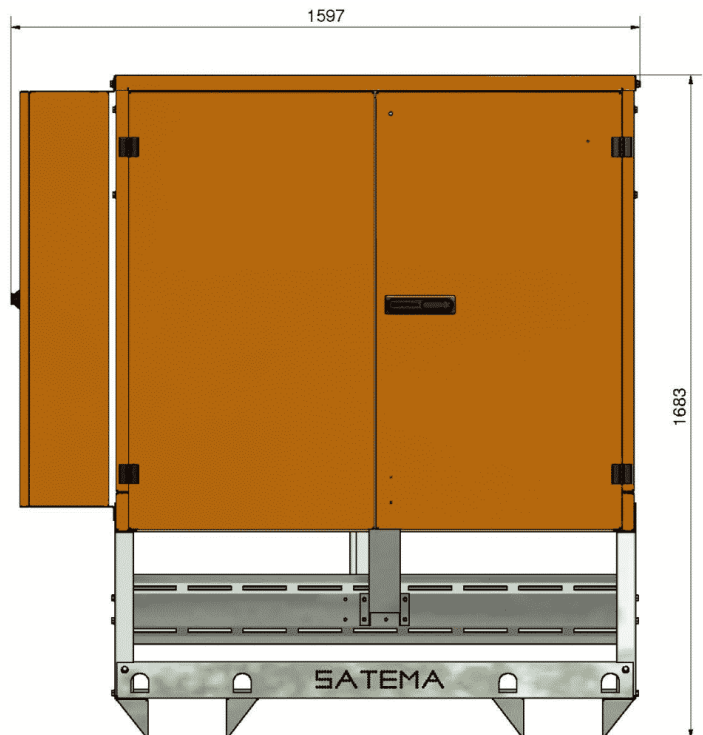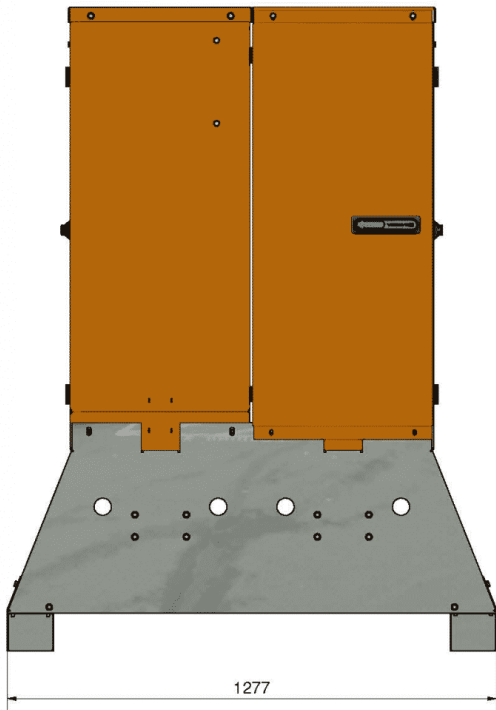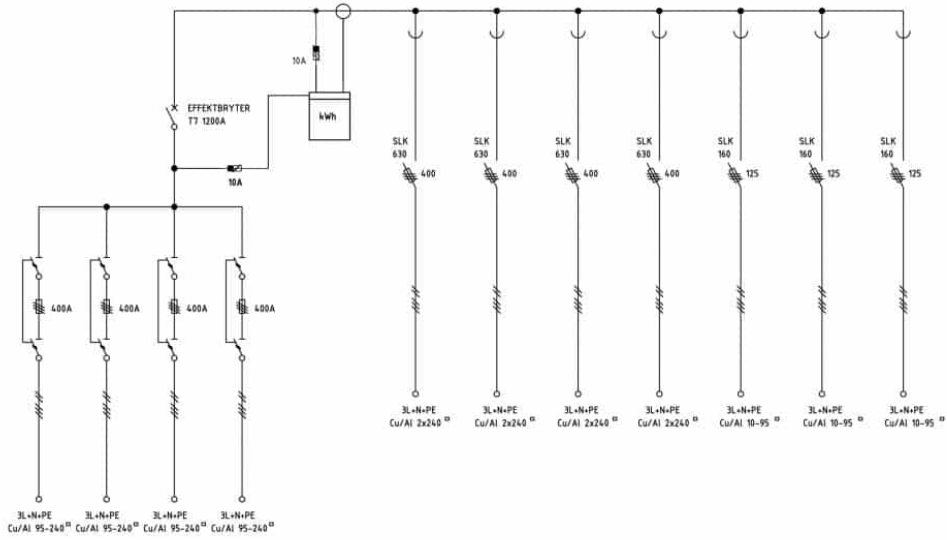

OTHER PRODUCT IMAGES

