

TEMPORARY POWER SUPPLY CABINET WITH METER 630A

Modular temporary power supply cabinet with meter to hard use at construction sites. Robust and compact marine aluminum frame, lifting eyes, forklift pockets and lockable doors. Space reserve for kWh meter. Weight 250 kg.



SKU: S19481



TECHNICAL ATTRIBUTES

Nominal Current	630 A	RCD	30 mA ja 300 mA
Nominal voltage	400V	Short-circuit resistance	I _{cf} = 25 kA
Input fuses	NH1 1x250A 2x400A	Weight	250 kg
Size of the input cable	3 x 95-240	Dimensions (H x W x D)	1916 x 1264 x 834 mm
Kiinteät lähdöt	NH00 125A ja NH1-2 250A	Enclosure class	IP44
Fuse output	3 x SLK 160 ja 2 x SLK 400	Mallinumero	ZFSF630/32/2121-12 FI
Socket outlets	3 x 16A (230V), 1 x 16A, 2 x 32A, 1 x 63A	Ordering number	S19251
		Approvals	CE, EN60439-2

DIAGRAM IMAGES

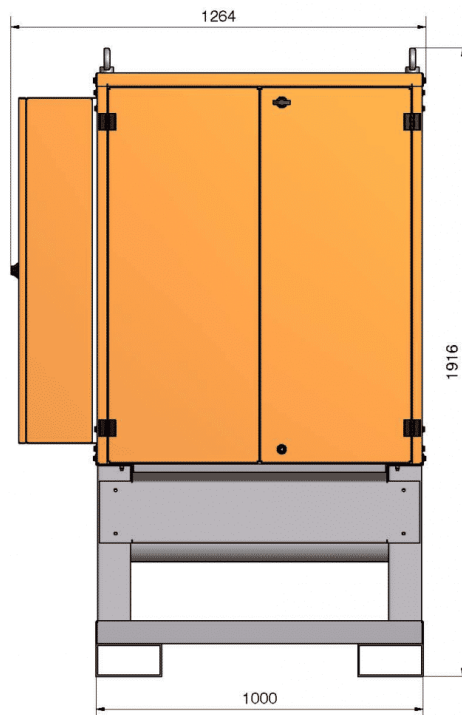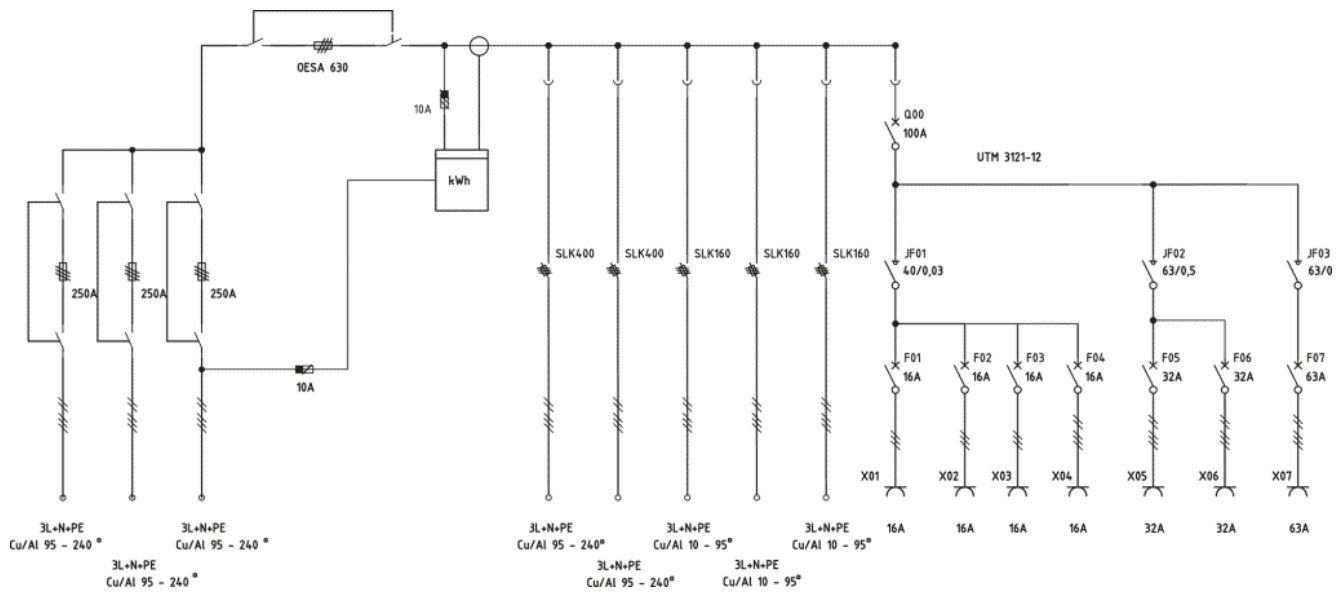

OTHER PRODUCT IMAGES

