

TEMPORARY POWER SUPPLY SUBCABINET 250 A

The 250A subcabinet is made of powder-coated and corrosion-resistant 2 mm aluminum. The solid structure of the cabinet withstands hard handling on site. The cabinet is equipped with lifting eyes, a stand designed for the truck and has lockable doors.


SKU: S19300



TECHNICAL ATTRIBUTES

Nominal Current	250 V	Oikosulkukestavyys	I _{cf} = 25 kA
Nominal voltage	400 V (50 Hz)	Weight	80 kg
Syötön sulake	NH1 250 A	Dimensions (H x W x D)	1293 x 1163 x 405 mm
Size of the input cable	1 x 95-240	Enclosure class	IP44
Kiinteät lähdöt	2 x SLK 160 ja 1 x SLK 400 / NH00 125 A ja NH1-2 250 A	Model	FSF250/21/3222-13
Socket outlets	3 x 16A (230V), 2 x 16A, 2 x 32A, 2 x 63A	Ordering number	S19300
RCD	30 mA ja 300 mA	Approvals	CE

DIAGRAM IMAGES

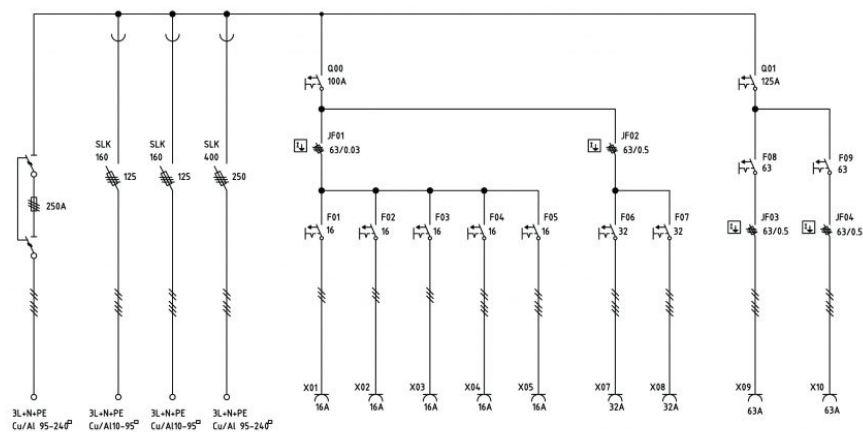

SF 250/1" 3"22-13 S193

HS AS

22.02.1"

