

SUB CABINET TAK 63A

Lightweight and compact site cabinet that can either stand on its own or can be hung on a wall. Easy to lift from its carrying handle and light (11 kg) to carry. The cabinet has self-closing, lockable safety covers. The solid frame of the cabinet is made of powder-coated and corrosion-resistant 2 mm aluminum and withstands heavy use on construction sites.


SKU: S19124



TECHNICAL ATTRIBUTES



Nominal Current	63 A	Dimensions (H x W x D)	543 x 466 x 273 mm
Nominal voltage	400 V (50 Hz)	Enclosure class	IP44
Socket outlets	8 x 16A (230V), 1 x 16A, 1 x 32A, 1 x 63A	Model	U63/8111-11 FI
RCD	30 mA ja 500 mA	Ordering number	S19124
Short-circuit resistance	I _{cf} = 17 kA	Approvals	CE
Weight	11 kg	Model, PRO	Mini63/4221-11 FI
		Ordering number PRO	S19355

DIAGRAM IMAGES

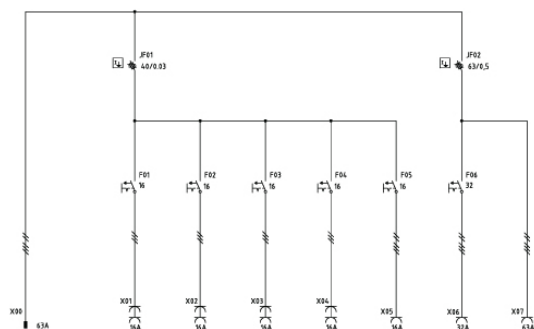

5

A*

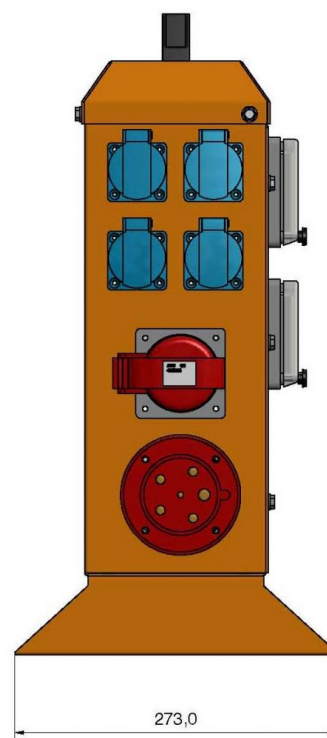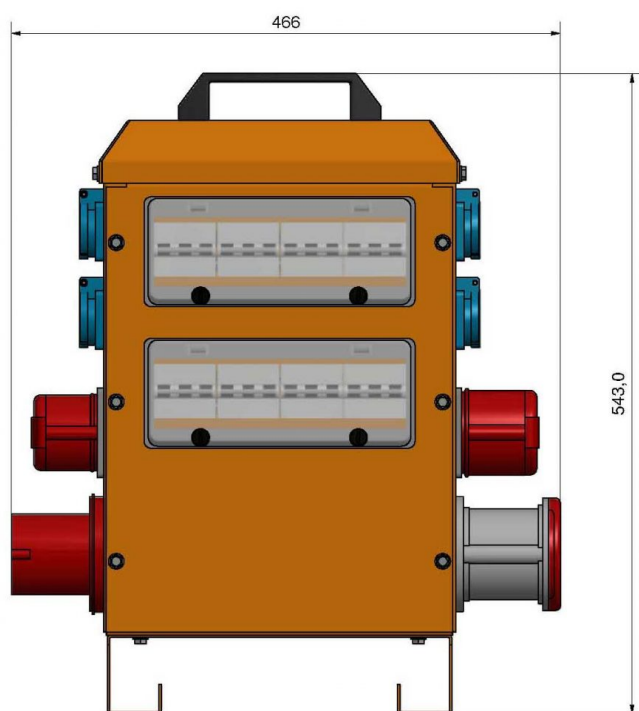

OTHER PRODUCT IMAGES

