


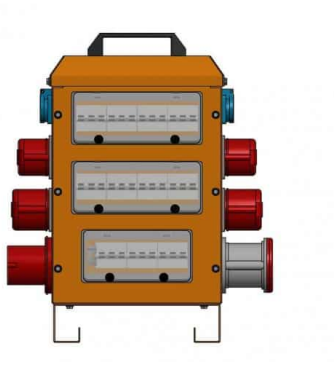

Light 11 kg worksite sub-distribution board with 4 x 230V, 2 x 16A, 2 x 32A and 1 x 63A outlets. Self-closing, lockable safety covers and a corrosion-resistant frame.

TEKNISET TIEDOT

Nominal Current	63 A
Nominal voltage	400 V (50 Hz)
Sockets	4 x 16A (230V), 2 x 16A, 2 x 32A, 1 x 63A
RCD	30 mA / 300 mA
Short-circuit resistance	Icf = 17 kA

Enclosure class	IP44
Approvals	CE
Body material thickness	2 mm
Measurements (H x W x L)	543 x 466 x 273 mm
Weight	11 kg