


## ESE 1506 DLS ES DI

14,3 / 13,6kVA ENDRESS DIESEL Line generator  
with electric start

SKU: E121012

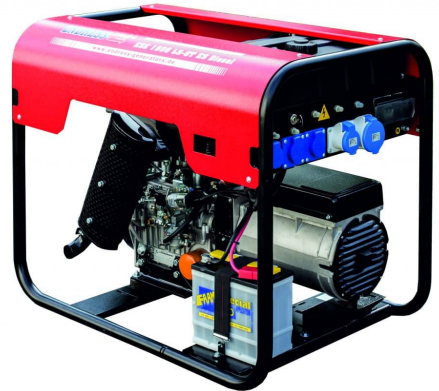

### TECHNICAL ATTRIBUTES

<b>Model</b>	LOMBARDINI 12LD477	<b>Nominal voltage V</b>	400 V
<b>Measurements L x W x H mm</b>	960 x 641 x 667 mm	<b>Nominal current A</b>	19,6 A
<b>Weight (kg) ~</b>	200kg	<b>Fuel</b>	Diesel
<b>Running time at 75% load (h)</b>	8,5h	<b>Protection class</b>	23 IP
<b>Shockproof sockets</b>	1 x 230V/16 A 1 x CEE 400V/16 A 1 x CEE 400V/32A	<b>Fuel tank capacity [l]</b>	24l
<b>Continuous power</b>	13,6 / 10,9 kVA/kW	<b>Frequency Hz</b>	50 Hz
<b>Kompressorit ja pumput enint.</b>	5200 W	<b>Power 3000 r/min speed kW</b>	13,8 kW
<b>Fuel cons. at 75% PRP [L/h]</b>	2,8l	<b>Power factor (Cos theta)</b>	0,9 cos φ
<b>Volume</b>	954 cm <sup>3</sup>	<b>Alternator model</b>	Duplex
<b>Start-up system</b>	Akkuavusteinen sähkökäynnistys	<b>Sound pressure level LPA (7m) db (A)</b>	82 db(A)
<b>Possible applications</b>	400V	<b>Sound pressure level LPA db(A)</b>	107 db(A)
<b>Max. Output [LTP] kVA/kW</b>	14,3 / 11,4 kVA/kW	<b>Electric devices up to</b>	10500 W
		<b>Työmaa- ja puutarhatyökalut (asti)</b>	6200 W
		<b>Welding tools up to</b>	6,0 mm ø

**No. of motor  
cylinders and type**

Kaksisynterinen  
nelitahtinen