


ESE 1506 DLS ES DI

14,3 / 13,6kVA ENDRESS DIESEL Line generator
with electric start

SKU: E121012

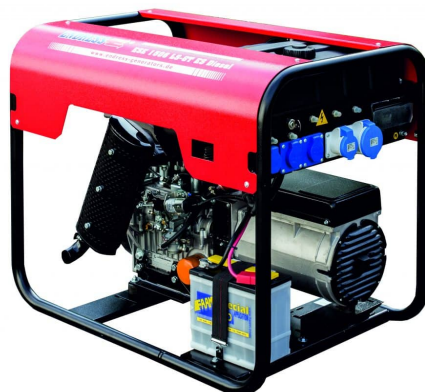

TECHNICAL ATTRIBUTES

Model	LOMBARDINI 12LD477	Nominal voltage V	400 V
Measurements L x W x H mm	960 x 641 x 667 mm	Nominal current A	19,6 A
Weight (kg) ~	200kg	Fuel	Diesel
Running time at 75% load (h)	8,5h	Protection class	23 IP
Shockproof sockets	1 x 230V/16 A 1 x CEE 400V/16 A 1 x CEE 400V/32A	Fuel tank capacity [l]	24l
Continuous power	13,6 / 10,9 kVA/kW	Frequency Hz	50 Hz
Kompressorit ja pumput enint.	5200 W	Power 3000 r/min speed kW	13,8 kW
Fuel cons. at 75% PRP [L/h]	2,8l	Power factor (Cos theta)	0,9 cos φ
Volume	954 cm ³	Alternator model	Duplex
Start-up system	Akkuavusteinen sähkökäynnistys	Sound pressure level LPA (7m) db (A)	82 db(A)
Possible applications	400V	Sound pressure level LPA db(A)	107 db(A)
Max. Output [LTP] kVA/kW	14,3 / 11,4 kVA/kW	Electric devices up to	10500 W
		Työmaa- ja puutarhatyökalut (asti)	6200 W
		Welding tools up to	6,0 mm ø

**No. of motor
cylinders and type**

Kaksisylinterinen
nelitahtinen