


MOBILE AIR-TO-AIR HEAT PUMP MW80

A mobile air-to-air heat pump blows warm air into construction sites and other temporary spaces. The plug-in model is quick to install and perfect for temporary needs. Installed outdoors, the heat pump circulates air and warms the interior quickly to the desired temperature.

A mobile air-to-air heat pump works on the same principle as the pumps used in homes, except that here the outdoor and indoor units are in the same package. Hoses (ø 525 mm) are connected to the pump, through which warm air is blown under high pressure from the outdoor unit into the interior, and others that draw air from inside to the pump to be heated. The condensate hose is heated so it cannot freeze.

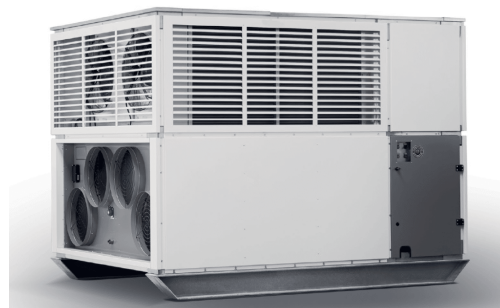

SKU: 804010002-en

TECHNICAL ATTRIBUTES

Operating temperature	-20°C - +25°C	Supply	36A CEE
Nom. heat output (A7/L35)	96.7 kW	Max. rated current	62 A
COPh (A-7/L35) air	2.34	Enclosure rating	IP44
COPh (A2/L35) air	2.77	Air hose connection	ø 525 mm
COPh (A7/L35) air	3.06	Dimensions (L x W x H)	3 x 2.3 x 2.35 m
SCOPh air	2.73	Weight	2750 kg
Airflow	16,000 m³/h	Noise level	70 dB(A)
Max. air pressure	250 Pa	Max. condensate	20 l/h
Voltage	400V 50Hz	Refrigerant	R454C

Max. energy

40 kW